



2. CENTRAL LIFTING POINT MUST BE A MINIMUM OF 10 FT. (3048mm) FOR 010-030 SIZES AND 12 FT. (3658mm) FOR 035-060 SIZES ABOVE THE TOP OF THE UNIT.
3. LIFTING HOLES PROVIDED ARE 2.25 IN. (57.2mm) DIAMETER.
4. CHECK BILL OF LADING FOR SHIPPING WEIGHT OF UNIT.
5. 010-030 SIZES SUBTRACT 230 LBS (104 KGS) FROM THE MAX WEIGHT FOR UNITS WITHOUT PUMPS. 035-060 SIZES SUBTRACT 290 LBS (132 KGS) FROM THE MAX WEIGHT FOR UNITS WITHOUT PUMPS.

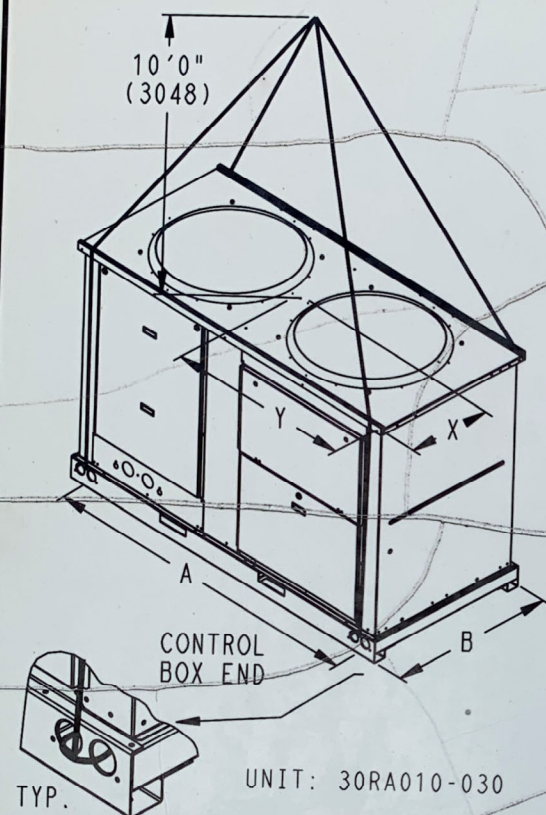

UNIT: 30RA010-030

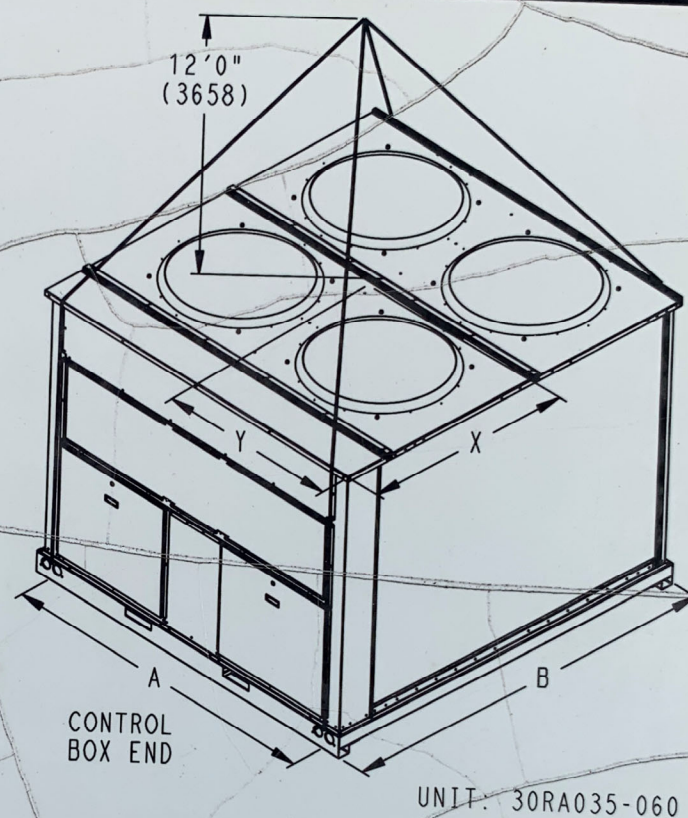

UNIT: 30RA035-060

MODEL NUMBER	MAX. SHIP WT. W/O PACKAGING		MAX. SHIP WT. W/PACKAGING		LIFTING HOLES				CENTER OF GRAVITY			
	LBS	KGS	LBS	KGS	A		B		X		Y	
					IN	MM	IN	MM	IN	MM	IN	MM
30RA010	1029	467	1107	502	57.39	1458	40.25	1022	18.40	467	37.80	960
30RA015	1043	473	1121	508	57.39	1458	40.25	1022	18.35	466	37.69	957
30RA018	1450	658	1536	697	79.39	2017	40.25	1022	18.37	467	38.77	985
30RA020	1458	661	1544	700	79.39	2017	40.25	1022	18.38	467	38.79	985
30RA025	1567	711	1653	750	79.39	2017	40.25	1022	18.58	472	38.93	989
30RA030	1608	729	1694	768	79.39	2017	40.25	1022	18.59	472	38.98	990
30RA035	2850	1293	3055	1386	79.39	2017	92.12	2340	36.45	926	46.08	1171
30RA040	2872	1303	3077	1396	79.39	2017	92.12	2340	36.24	921	44.03	1118
30RA045	2925	1327	3130	1420	79.39	2017	92.12	2340	36.24	921	46.15	1172
30RA050	2950	1338	3155	1431	79.39	2017	92.12	2340	36.00	914	44.00	1118
30RA055	3056	1386	3261	1479	79.39	2017	92.12	2340	36.48	927	44.60	1133
30RA060	3062	1389	3267	1482	79.39	2017	92.12	2340	36.50	927	44.56	1132